


HLK-1300

30mm Bore Cylinders



- Compact 30mm bore actuator
- Highly corrosion resistant
- Extend and retract ports positioned at the rear of cylinder
- Three standard stroke lengths - 65mm, 100mm, 135mm
- Any length cylinder can be provided
- Pivot points in rear designed to accept IGUS® for maximum underwater friction reduction
- Bushes take pins of 0.375" (9.525 mm) diameter
- Various mounting options available

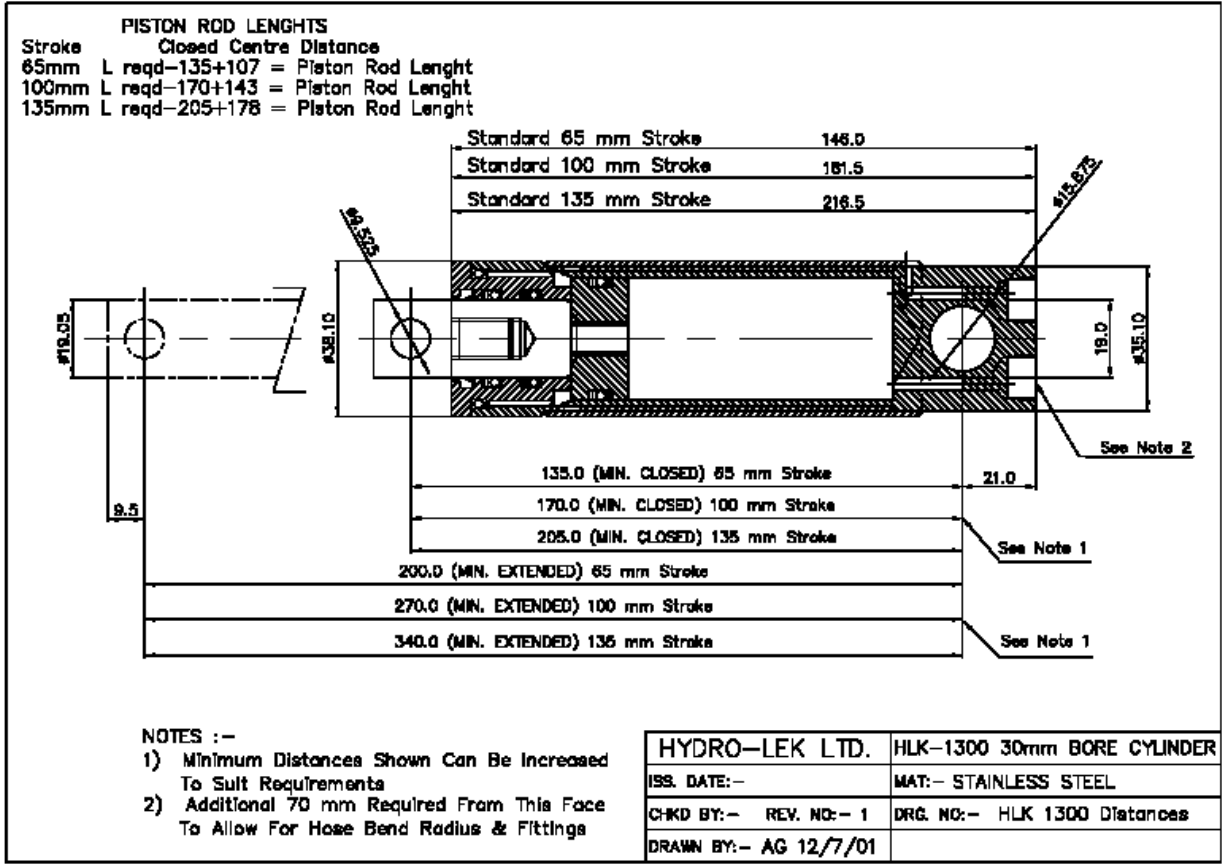

Specification:

Cylinder Construction	316 Stainless Steel
Piston rod	316 Stainless Steel
Extend force at 210 bar	1485 kg
Retract force at 210 bar	890 kg
Standard Stroke length	65mm 100mm 135mm
Weight In air	65mm Stroke: 950g 100mm: 1.1 kg 135mm: 1.5 kg
 In Water	65mm Stroke: 800g 100mm: 930g 135mm: 1.2 kg
Temperature range	-40°C to +80°C
Face/Nose Mount Adapters	316 Stainless Steel
Hydraulic Ports	Hydro-Lek Mini Banjo Fitting or 1/8 NPT adaptor