




HYDRO-LEK

REMOTE HANDLING SPECIALISTS

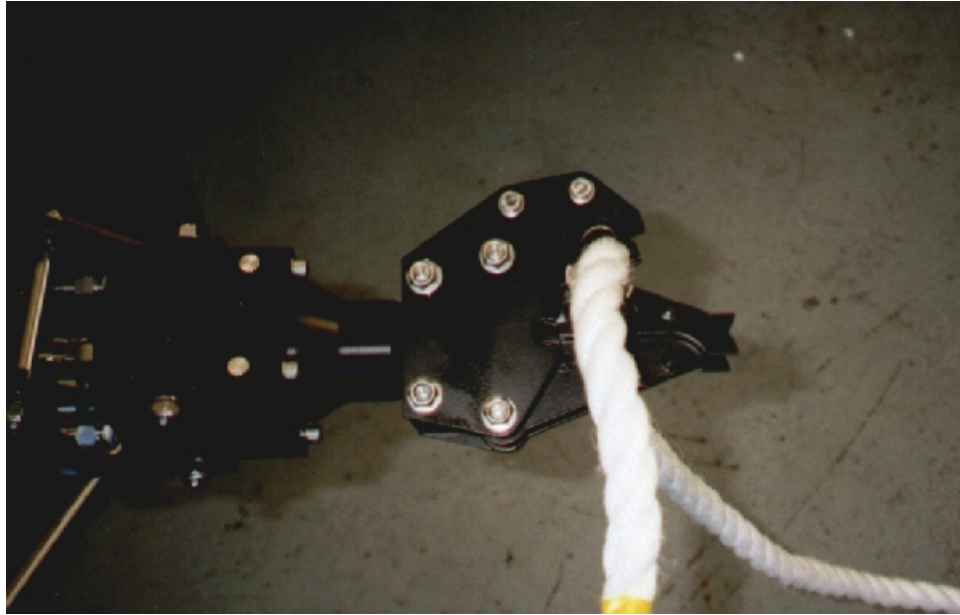

HLK-2010 Jaw Assembly

This jaw assembly has a unique soft rope cutting facility. With the jaws closed, access for up to 20mm diameter polypropelene rope is made between the cutting blades. By opening the jaw fully, the blade cuts the rope. The working pressure required is 2500 P.S.I. (170 Bar)