


HLK-90250

250V DC Power Pack

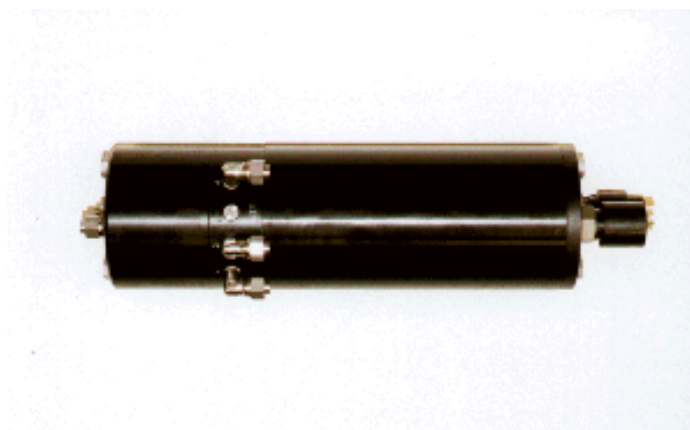

Features

- Medium pressure, low flow power pack
- Incorporates a pressure regulator in the manifold
- Motor is kept in one manifold
- Shaft seal dynamically tested to 210 BAR
- Motor housing can be lengthened to incorporate telemetry control system

Specification:




Dimensions	Length	315mm
	Diameter	100mm
Weight	Weight in air	5.0Kg
	Weight in water	3.0Kg
Depth Rating		2000 Metres
Power	Input	240V A.C. or D.C. 1.8A (Nom) @ 140 BAR
	Output	140BAR at 0.5L/min
Ports		1/8NPT
Construction		HE 30 Hard anodised aluminium

Specification subject to change without prior notification

2 x Pressure + 2 x Tank return Ports

MCBH3M 3 pin Subconn Connector

2 x Tank Ports

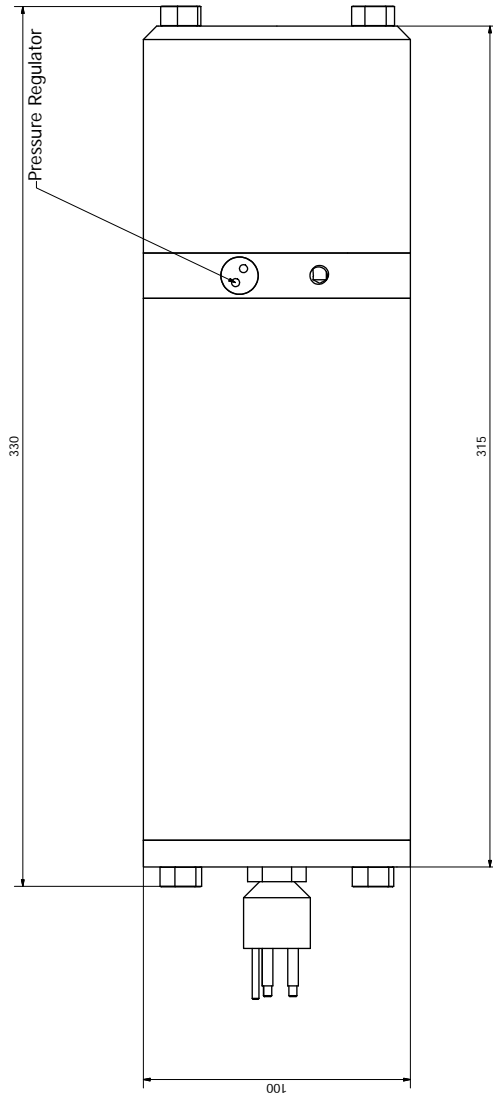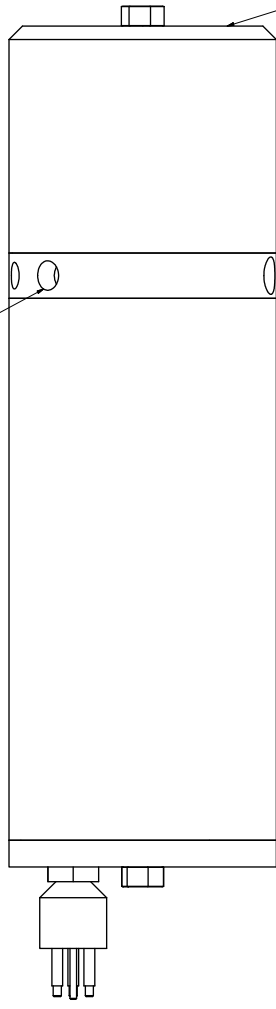

Specification

Dimensions	Length 315mm Diameter 100mm
Weight	In Air 5Kg In Water 3Kg
Depth Rating	2000M
Power	Voltage 240Volts AC or DC Current 1.8A (Nom) @ 140BAR
Ports	1/8" NPT
Construction	HE30 Aluminium
Finish	Hard Black Anodise

Company	Product	Approved by	Date	Issue
Alan Green	Hydro-Lok Limited, Falcon House Falcon Business Park, Lumbour Road Frunchampstead, Berks. RG40 4QG Tel: 01493 726953 Fax: 01493 726915			02/08/2004
Power Pack Data				3-Port
HLK 90200 /90250				0
Edition				1 / 1