

# HLK-91100

## Low voltage DC Power Pack






### Features

- Low voltage DC operated, medium flow power pack
- Pressure regulated through manifold
- Motor is a one atmosphere, 100 mm diameter housing
- Shaft seal is dynamically tested to 210 Bar


### Specification:

<b>Dimensions</b>	Length	264mm
	Diameter	100mm
<b>Weight</b>	Weight in air	6.0Kg
	Weight in water	4.0Kg
<b>Depth Rating</b>		2000m standard
<b>Power</b>	Input	12-154V DC 250W at 140 Bar 360W at 210 Bar
	Output Pressure	210 Bar max at 0.5 L/min
	Output Flow	3 L/min
<b>Ports</b>		1/8" NPT
<b>Construction</b>		HE 30 Hard anodised aluminium

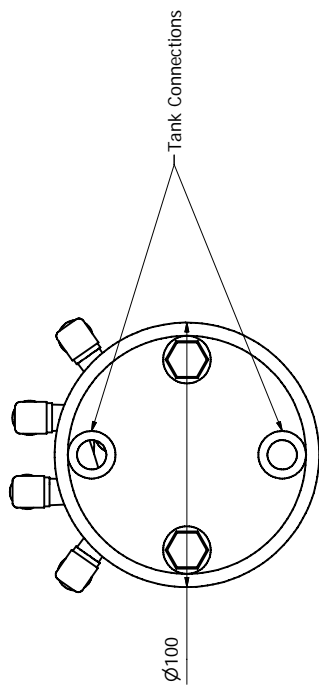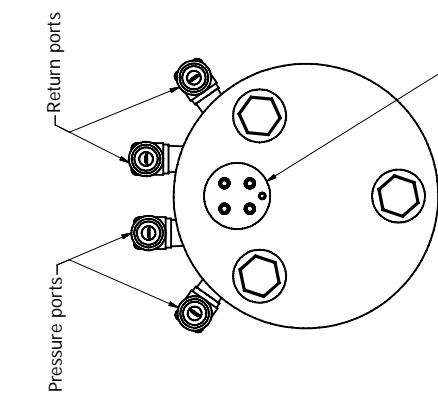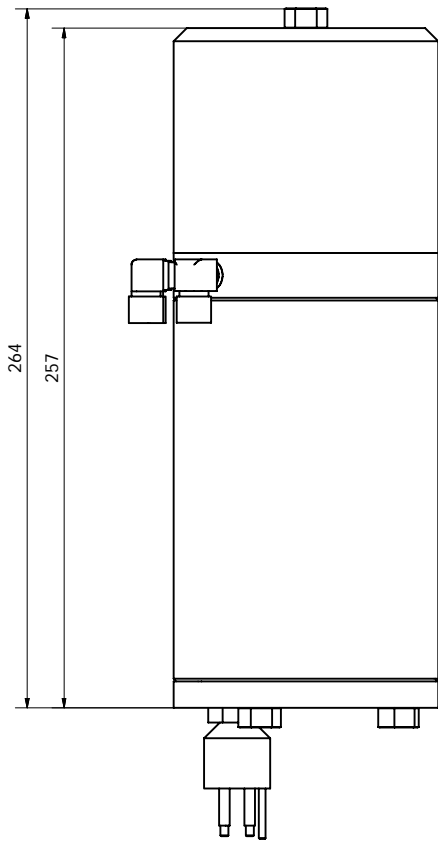

**Specification:**

- Dimensions**
- Length** 264mm
- Diameter** 100mm
- Weight**
- Weight in air** 6.0Kg
- Weight in water** 4.0Kg
- Depth Rating** 2000 Metres
- Power**
- Input** 12 - 150V D.C.
- Output** 450 Watts (Max)  
210BAR at 0.5L/min
- Ports** 1/8NPT
- Construction** HE 30 Hard anodised aluminium

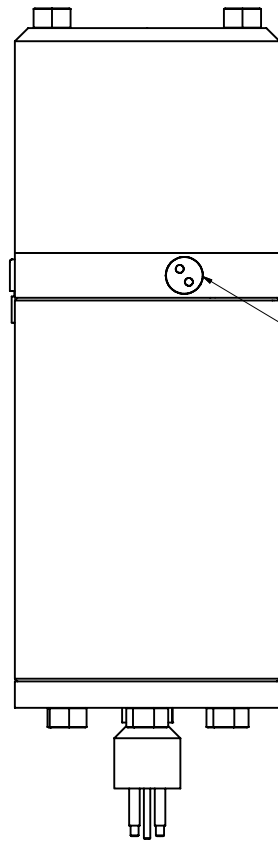

Pressure Adjuster

Designed by Alan Green	Checked by	Approved by	Date	Date
			30/06/2008	
Hydro-Lek Limited, Unit 4, Weiler Drive Hogwood Lane Industrial Estate Finchampstead, Barks, RG40 4QZ Tel: 0118 9736903 Fax: 0118 9736915				
Power Pack Assembly			HLK 91100	1 / 1
Edition			0	1 / 1
Sheet			0	1 / 1

**Specification & dimensions subject to change without prior notice**