

# HLK-60110

## Bi-Directional Valve



### Features

- Houses a solenoid operated cartridge valve
- Capable of handling up to 20 Litres/min
- Ports can be configured to suit various options


### Specification:

<b>Dimensions</b>	Length	270mm
	Diameter	75mm
<b>Weight</b>	Weight in air	3.0Kg
	Weight in water	2.5Kg
<b>Ports</b>	Pressure, Tank & Output	3/8" BSP
	Compensation	1/8" NPT
<b>Maximum Working Pressure</b>		210 Bar
<b>Maximum Flow</b>		20 Litres/min
<b>Coil Voltage</b>		24V DC
<b>Construction</b>		HE30 Aluminium Hard Black Anodised

# Specification & Parts Subject to Change Without Prior Notification

## Wiring Information

- Pin 1 = Coil A -
- Pin 2 = Coil B -
- Pin 3 = Common +

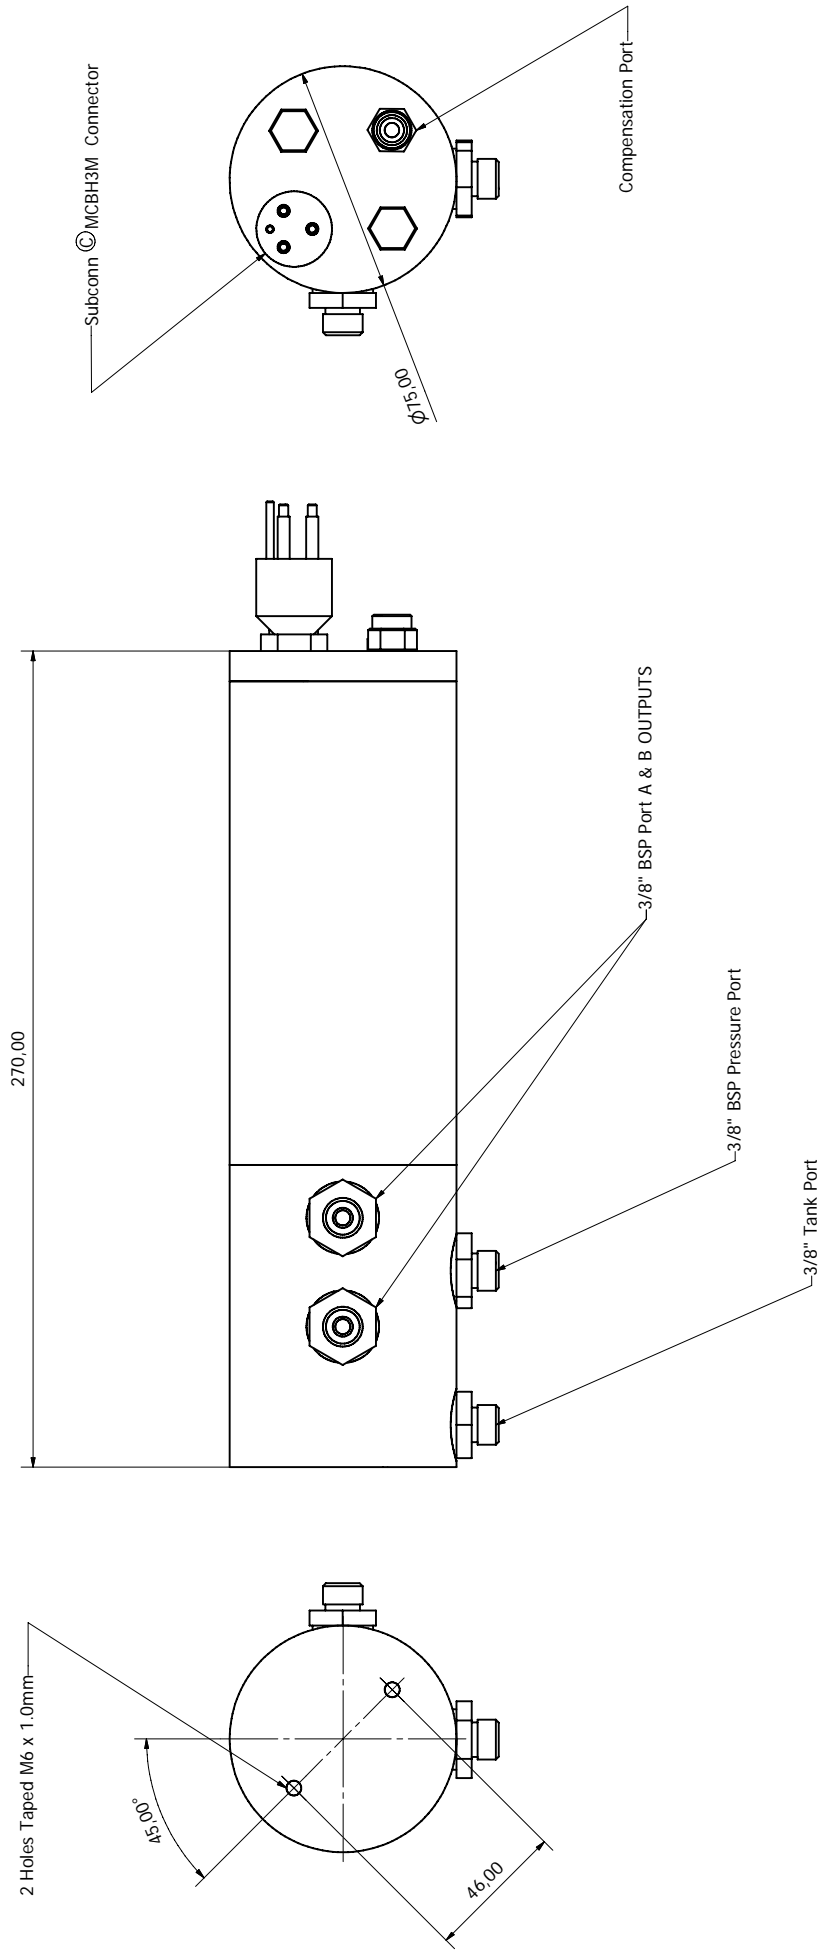

Designed by Alan Green	Checked by	Approved by	Date 21/08/2006
Hydro-Lek Limited, Unit 4, Weller Drive Highwood Lane Industrial Estate Fitchamstead, Bexley, RG40 4QZ Tel: 0118 9736903 Fax: 0118 9736915			Control Valve GA
HLK-60110			Sheet Edition 0 / 1 / 1