

HLK-70150

5-Way Valve Pack



Features

- Compact and lightweight
- Constructed from PET (Hard anodised aluminium version available)
- Able to withstand 100 Bar hydraulic pressures (PET version) and 210 Bar (Aluminium version)
- Incorporates 5 standard bi-directional cartridge valves fitted with Hydro-Lek solenoid coils

Specification:

Dimensions	Length	200 mm	
	Width	50 mm	
	Height	207mm	
Weight	Weight in air	4.8Kg PET	6.8Kg Aluminium
	Weight in water	2.8Kg PET	4.8Kg Aluminium
Functions		5 x Bi-directional Solenoid Valves	
Voltage		Standard 48V DC (24V DC option)	
Electrical Connector		16 pin Micro Series Subconn Connector	
Hydraulics	Max working pressure	100 Bar (PET)	
		210 Bar (Aluminium)	
Porting		1/8" NPT	
Construction		Polyethylene Terephthalate (PET) Hard Anodised Aluminium	

SPECIFICATIONS :

DIMENSIONS :

HOUSING LENGTH 200mm
 HOUSING WIDTH 50mm
 HOUSING HEIGHT 207mm

WEIGHT :

WEIGHT IN AIR POLYESTER 4.8 Kg
 WEIGHT IN WATER POLYESTER 2.8 Kg
 WEIGHT IN AIR ALUMINIUM 6.8 Kg
 WEIGHT IN WATER ALUMINIUM 4.8 Kg

FUNCTIONS :

5 X BI-DIRECTIONAL SOLENOID VALVES

CONNECTOR :

16 WAY MICRO SERIES SUBCONN CONNECTOR

VOLTAGE :

STANDARD 24V DC

HYDRAULICS :




MAX WORKING PRESSURE POLYESTER 100BAR
 ALUMINIUM 210BAR

PORTING :

1/8" NPT


CONSTRUCTION :

POLYESTER (PET) OR ALUMINIUM

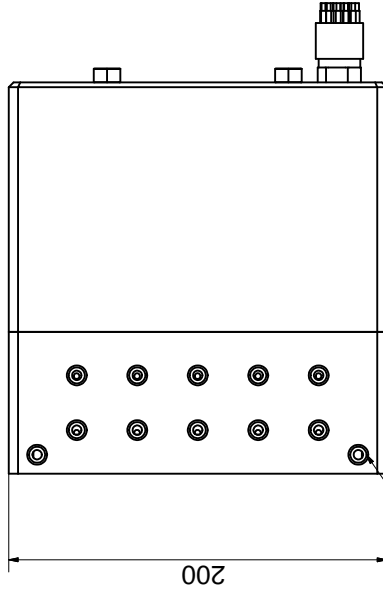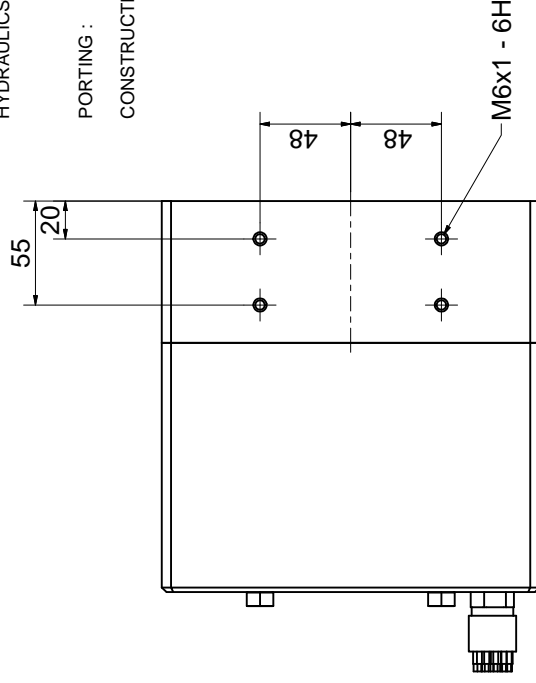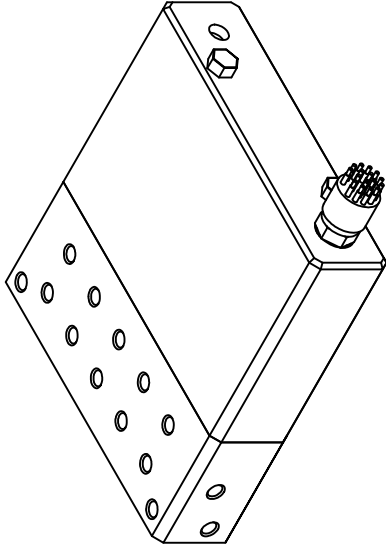


TANK PORT
(BOTH ENDS)

PRESSURE PORT
(BOTH ENDS)

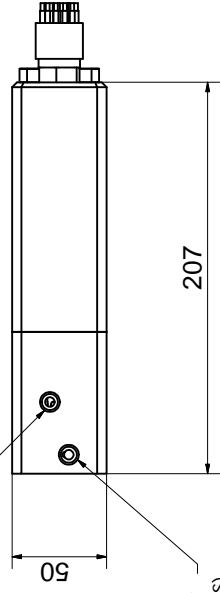

TANK PORT
(BOTH ENDS)

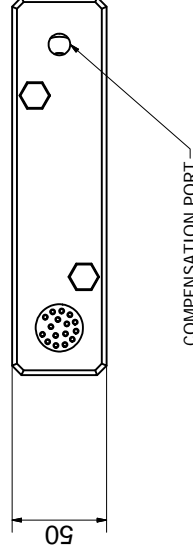

COMPENSATION PORT

Designed by Gary Lavery	Checked by	Approved by - date	Date 01/12/2003
Hydro-Lek Limited, Falcon House Falcon Business Park, Ivanhoe Road Hogwood Lane Industrial Estate Finchamps, Barks, RG40 0QC Tel: 0118 9736903 Fax: 0118 9736915		Edition 2 / 1 / 1	
Valve Pack		CMR 70150	