

# HLK-7020

## 4-Way Valve Pack




### Features

- One of the most compact valve packs available
- Housed in 100mm diameter housing with 4 bi-directional solenoid valves
- HLK solenoid coils can be wound to suit many voltage supplies
- Full back EMF diode board also included inside housing
- All flow and connection ports are located at end of the manifold enabling units to be mounted in very confined spaces

### Specification:

Dimensions	Housing Length	215mm
	Housing diameter	100mm
Weight	Weight in air	4.0Kg
	Weight in water	2.5Kg
Functions	4 x Bi-directional solenoid valves	
Voltage	Standard 24V DC	
Hydraulics	Max working pressure	210 Bar
Porting	7/16 SAE	
Construction	HE 30 Hard anodised aluminium	

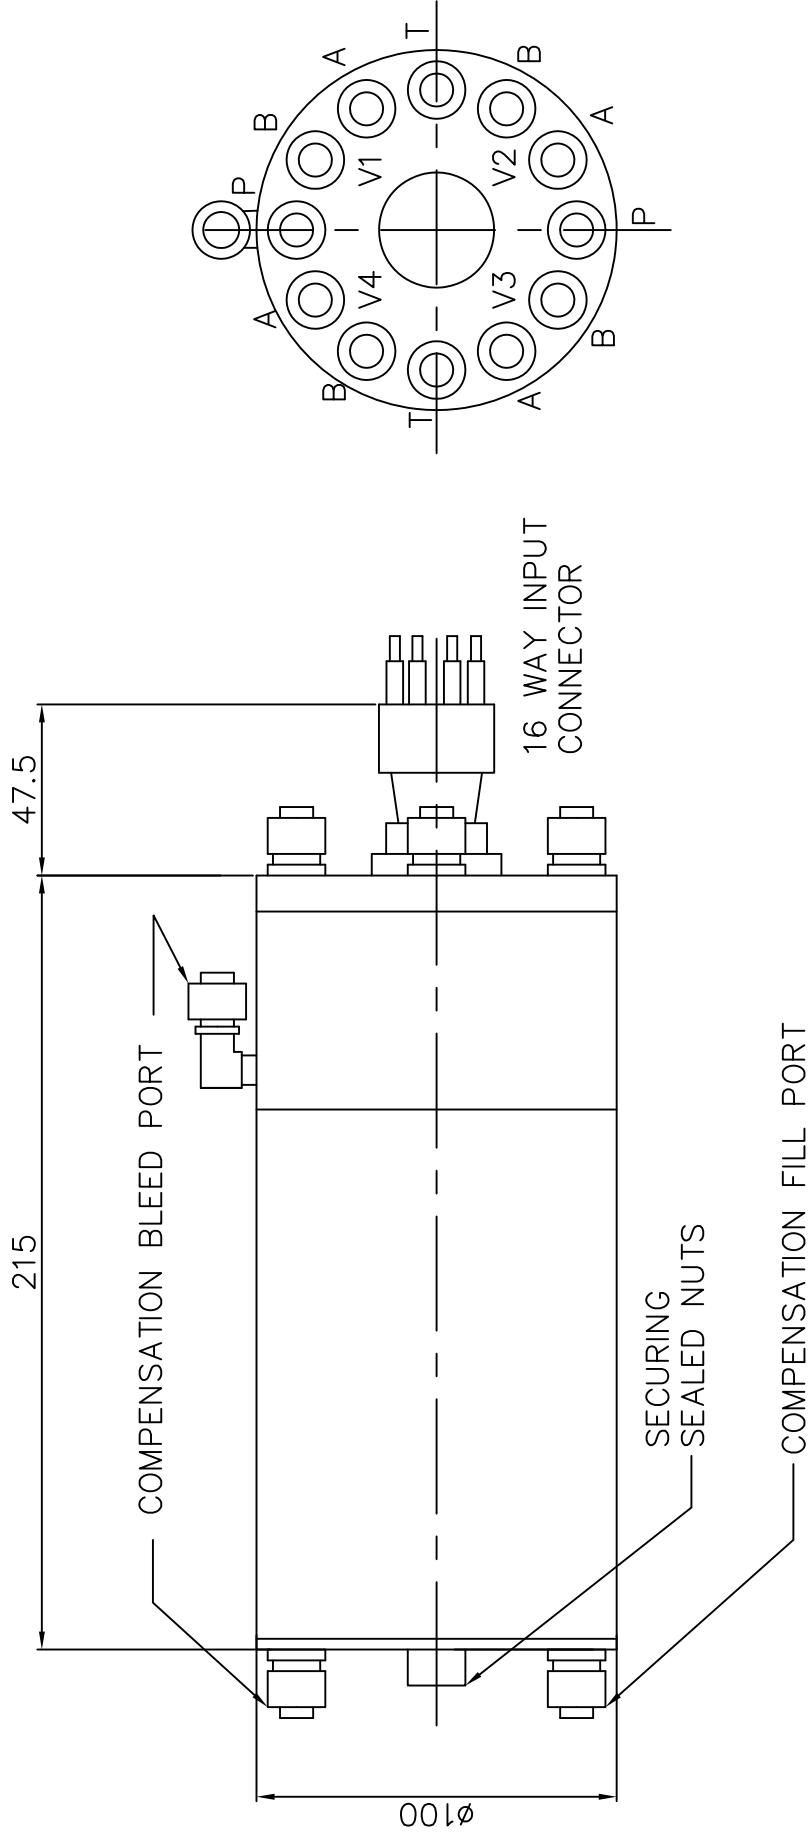

### SPECIFICATION

FUNCTION 4 x BI DIRECTIONAL SOLENOID VALVES  
 VOLTAGE 24V DC  
 MAX. WORKING PRESSURE 210 BAR  
 WEIGHT IN AIR 4 KG  
 WEIGHT IN WATER 2.5 KG  
 PORTS 7/16" SAE  
 MATERIALS: - HE 30 HARD ANODISED ALUMINIUM

HYDRO-LEK LTD.	HLK-7020 VALVE PACK
ISS. DATE: -	MAT: -
CHKD BY: -	REV. NO: - 1
DRAWN BY: -	JW 19/8/99
	DRG. NO: - HLK 7020/DATA