

HLK-90130

3-Phase 0.75KW Power Pack




Features

- 3-phase power pack which is available as either a 440V unit or a 660V unit.
- Motor is fitted within an oil-filled, pressure-compensated housing, separate to pump/reservoir

Specification:

| | | |
|---------------------|------------------------------|--|
| Dimensions | Overall Length | 268mm |
| | Motor Diameter | 120mm |
| Weight | Weight in air (Oil Filled) | 8.0Kg |
| | Weight in water (Oil Filled) | 5.0Kg |
| Power | Input | 440/660V 3-phase |
| | Output Pressure | 0.75KW (nom) |
| | Output Flow | 140 Bar (nom) |
| Ports | | 1.25L/min |
| Construction | | 1/8" NPT |
| | | HE 30 Aluminium Hard Black Anodised |

| ISS | DCN | DESCRIPTION | DATE | SIGN | CHK'D |
|-----|-----|-------------|----------|------|-------|
| B | - | DESCRIPTION | 04/03/10 | J0 | - |

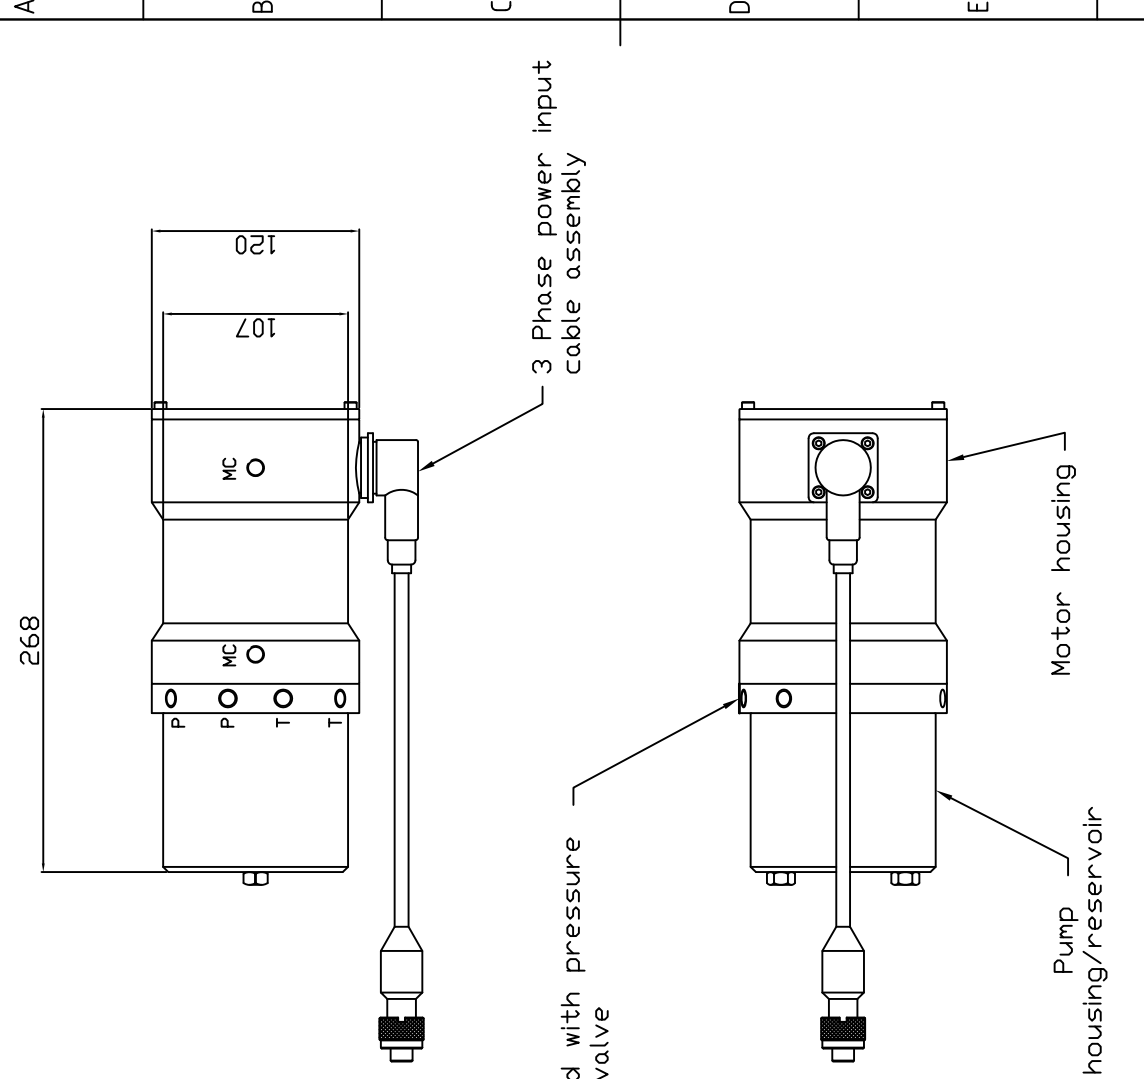

SPECIFICATION

Input: Voltage: 440 DR 660 Volt 3-Phase
 Power: 0.75kW (nom)

Output: Pressure: 140 bar (Nom)
 210 bar (Max)
 Flow: 1.25 l/min

Ports: P = Pressure 1/8" NPT
 T = Tank 1/8" NPT
 PC = Pump Compensation 1/16" UNF (SAE)
 MC = Motor Compensation 1/8" NPT

Dimensions: Length: 268mm
 Diameter: 120mm

Weight: In air: 8kg
 In water: 5kg

Materials: Aluminium alloy 6082-T6 (HE30)
 Hard black anodized

| Designed by | Checked by | Approved by - | File name | Date | Scale |
|-------------|------------|---------------|----------------------|----------|-------|
| J0 | | | HLK 90130 outline GA | 17/01/07 | NTS |

POWER PACK - 3ph 0.75kW MOTOR
 HLK 90130
 Edition B
 Sheet A3

Hydro-Lek Limited
 Unit 4, Veller Drive,
 Hogwood Lane Industrial Estate,
 Finchampstead,
 Berks, RG40 4GZ. Tel: 0118 9736903