

HLK-CRA6

6-Function Long Reach Manipulator




Features


- 6 degrees of freedom manipulator
- Rugged and tough
- Excellent dexterity and articulation
- Lift of 32Kg at full reach
- Continuous jaw rotate
- Incorporates 19mm rope cutter

Specification:

Dimensions	Length of arm	1500mm
	Length of slew	280mm
	Width	150mm
	Height when stowed	600mm
Capacities	Jaw Rotate	360° continuous
	Torque at 140 Br	38Nm
	Lift capacity at full reach at 140 Bar	32Kg
Weight	Weight in air	28Kg
	Weight in water	14.5Kg
Construction		316 SS HE 30 Hard anodised aluminium Black polyethelene
Ports		7/16 SAE - 1/8 NPT

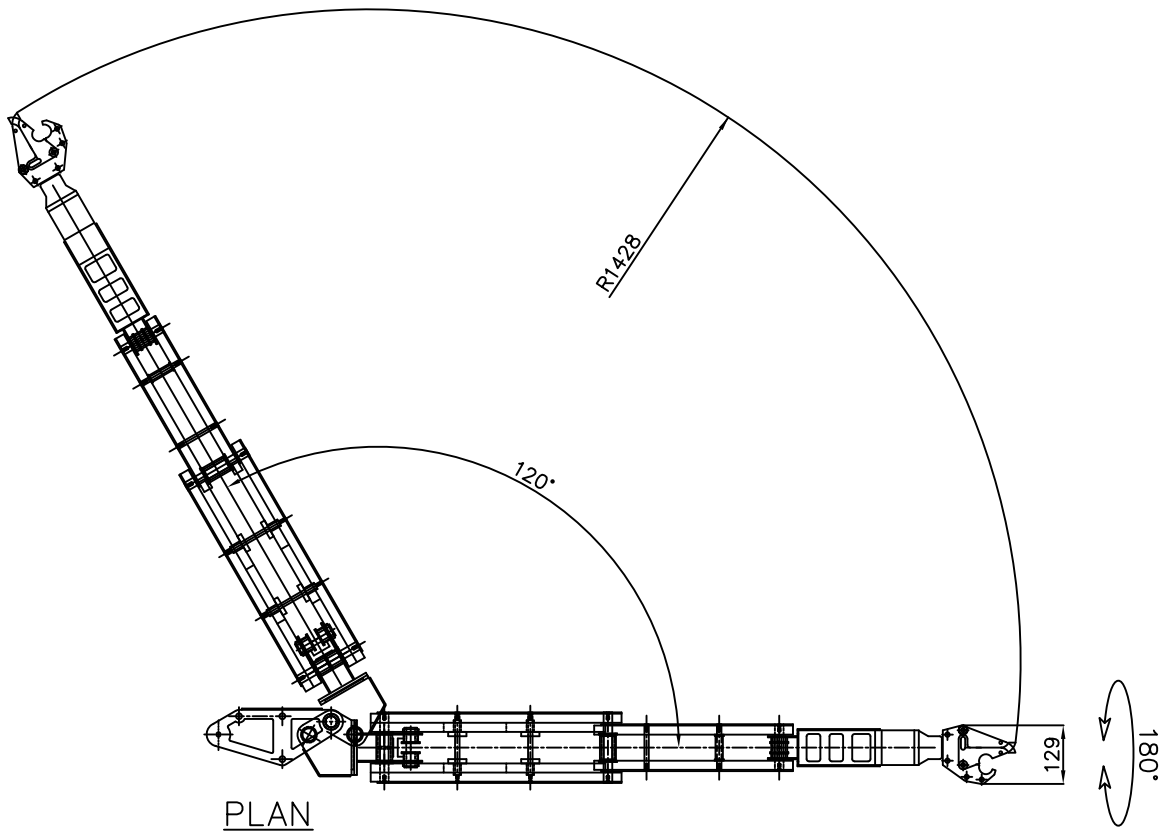

PLAN

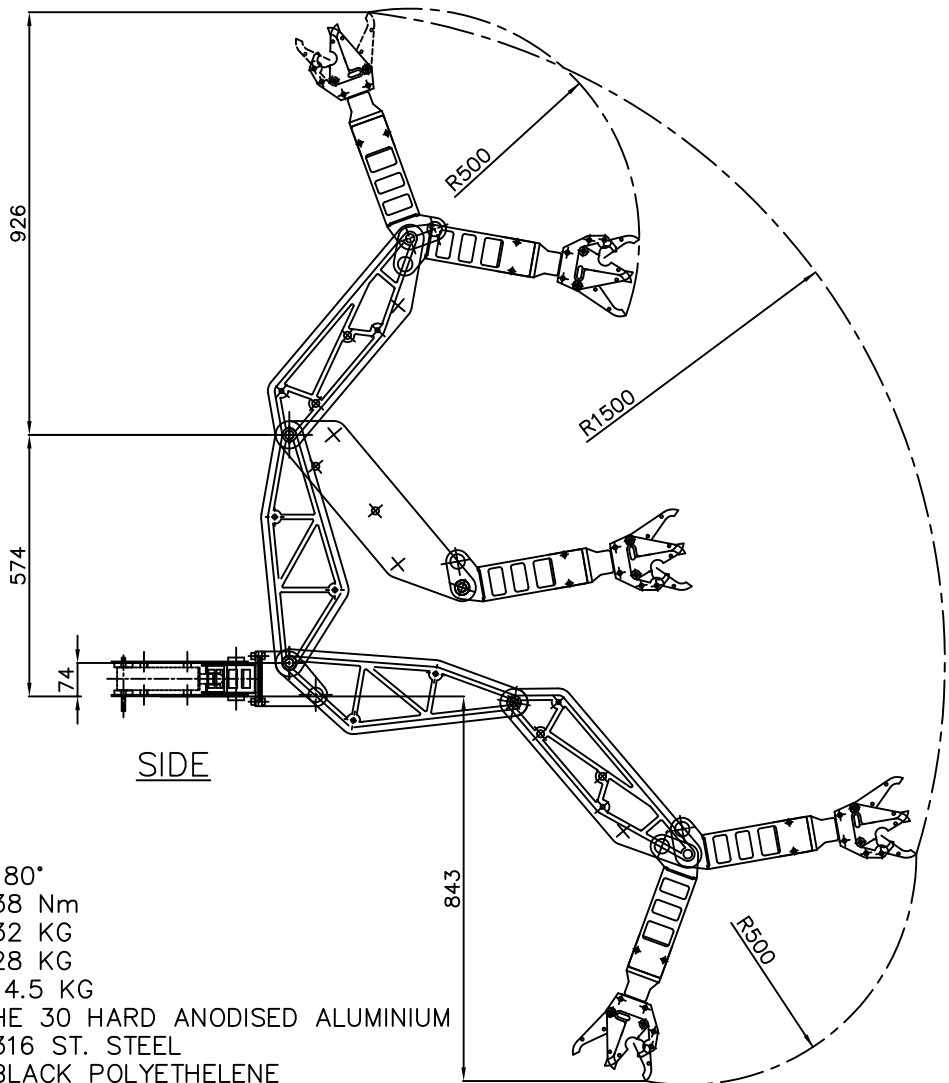

SIDE

SPECIFICATION

ROTATE	180°
TORQUE AT 140 BAR	38 Nm
LIFT AT 140 BAR	32 KG
WEIGHT IN AIR	28 KG
WEIGHT IN WATER	14.5 KG
MATERIALS: -	HE 30 HARD ANODISED ALUMINIUM
	316 ST. STEEL
	BLACK POLYETHELENE
PORTS	1/8" NPT / 7/16" SAE.

HYDRO-LEK LTD.	HLK-CRA6 MANIPULATOR
ISS. DATE: -	MAT: -
CHKD BY: - REV. NO: - 1	DRG. NO: - HLK 5300/DATA
DRAWN BY: - JW 19/8/99	